Gleitringdichtung 10 mm

schmizo swiss scientific glass

zum Abdichten von Rührwellen mit Ø 10 mm jeglicher Art in einem Normschliff.
Produktberührende Teile: PTFE, PFA, FFKM und Borosilikatglas.

! *Die Standardvariante enthält Kugellager mit Metall-Kugeln. Für den Einsatz mit aggressiven Dämpfen und Gasen gibt es auch Modelle mit Keramik-Kugellager. Für den explosionsgeschützten Bereich stehen ebenfalls entsprechende Modelle zur Verfügung.*

Kurz-Bedienungsanleitung

Vorgängig alle Teile auf Unversehrtheit prüfen!

Alle Infos auf: **www.schmizo.ch**

Startseite / Reaktoren Zubehör / Rührführung / Gleitringdichtungen

Rändelring (1) festhalten und Rührerbefestigungsmutter (2) und Klemmkonus (3) entfernen.

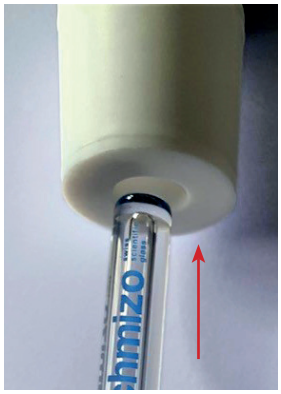

Rührer mit Wasser (vorzugsweise destilliertem) benetzen und von unten einführen (ev. zuerst durch den Deckel).

Rührwelle in die gewünschte Position bringen.

Klemmkonus über die Rührwelle führen (die Seite mit dem grösseren Durchmesser nach unten)

Rührerbefestigungsmutter kräftig von Hand anziehen, aber dazu kein Werkzeug benutzen!

Mechanical Seal 10 mm

schmizo swiss scientific glass

suitable for sealing stirrers with a 10 mm shaft of any type in a standard ground joint.
Materials in contact with the product: PTFE, PFA, FFKM and borosilicate glass.

! *The standard version contains ball bearings with metal balls. For use with aggressive vapors and gases, there are also models with ceramic ball bearings. Appropriate models are also available for explosion-proof areas.*

Short Operating Manual

Before use, check all parts for integrity!

All Info on: **www.schmizo.ch**

Home / Reactor accessories / Stirrer Bearings / Mechanical Seals

Hold the knurled ring (1) and remove the stirrer fastening nut (2) and the clamping cone (3).

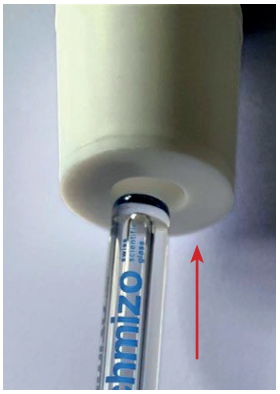

Wet the stirrer with water (preferably distilled) and insert it from below (possibly through the lid first).

Move the stirrer shaft to the desired position.

Guide the clamping cone over the agitator shaft (the side with the larger diameter facing downwards).

Tighten the stirrer fastening nut firmly by hand, but do not use any tools for this purpose!